


型名 Type Number	F 4 1 4 6 A		
定格 Rating	15 A ~ 30 A		
ねじ径 Screw Diameter	M3		
使用可能電流 Usable Current	15 A	20 A	30 A
適合電線 Compatible Wire	1.25 mm ²	2 mm ²	3.5 mm ²
推奨圧着端子 Recommended Crimp Terminal	R 1.25-3	R 2-3	R 3.5-4

一般公差 / General Tolerance ±0.5

尺度 / Scale 2/1 単位 / Unit mm

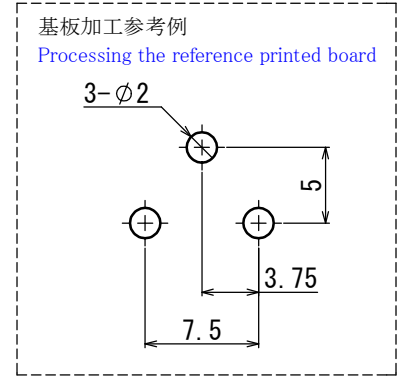

・注文方法: **型番** (下表の型番を御参照下さい。)

■仕様 Specifications. ・Ordering Form: Type No. (See the type number in the following table)

番号 Part No.	名称 Part Name	材質 Material	寸法 Size	規格 Standard	処理 Treatment
1	基板端子 Printed board Terminal	黄銅 Brass	板厚 t=1.0	-	スズメッキ Tin-Plated
2	結線ビス Screw	鉄 steel	M3	-	ニッケルメッキ Nickel-Plated

型番 Type No.	納入される物 Product Delivered
F4146A	基板端子(M3用)のみ(ビスなし) Printed board terminal (for M3) only (W/O screws)
F4146AS	基板端子M3×6Lバインドビス(Type⑧)組付 Printed board terminal+M3×6L binding head attached (Type⑧)

対応可能ビス Compatible screw	材質 Material	処理 Treatment	形状 Shape
PW, SWセムスパインド M3×6L Type③ With Plain (Flat) washer and spring lock washer M3×6L	鉄 steel	ニッケルメッキ Nickel-Plated	Type③
SWセムスパインド M3×6L Type④ With spring lock washer M3×6L	鉄 steel	ニッケルメッキ Nickel-Plated	Type④
PW, SWセムスナベ M3×7L Type⑤ With Plain (Flat) washer and spring lock washer M3×7L	鉄 steel	ニッケルメッキ Nickel-Plated	Type⑤
SWセムスナベ M3×7L Type⑦ With spring lock washer M3×7L	鉄 steel	ニッケルメッキ Nickel-Plated	Type⑦