


型名 Type Number	F 4 1 4 6 B		
定格 Rating	1 5 A ~ 3 0 A		
ねじ径 Screw Diameter	M 3 . 5		
使用可能電流 Usable Current	1 5 A	2 0 A	3 0 A
適合電線 Compatible Wire	1 . 2 5 mm ²	2 mm ²	3 . 5 mm ²
推奨圧着端子 Recommended Crimp Terminal	R 1 . 2 5 - 3 . 5	R 2 - 3 . 5	R 3 . 5 - 4

一般公差 / General Tolerance ±0.5

尺度 / Scale 2/1 単位 / Unit mm

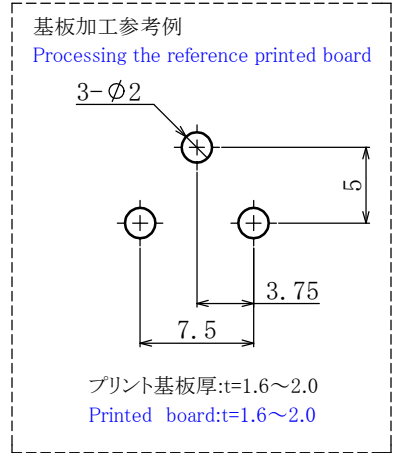

・注文方法: 型番 (下表の型番を御参照下さい。)

■仕様 Specifications. •Ordering Form: Type No. (See the type number in the following table)

番号 Part No.	名称 Part Name	材質 Material	寸法 Size	規格 Standard	処理 Treatment
1	基板端子 Printed board Terminal	黄銅 Brass	板厚 t=1.0	C2680R	スズメッキ Tin-Plated
2	結線ビス Screw	黄銅 Brass	M3.5	C2700W	ニッケルメッキ Nickel-Plated

型番 Type No.	納入される物 Product Delivered
F4146B	基板端子(M3.5用)のみ(ビスなし) Printed board terminal (for M3.5) only (W/O screws)
F4146BS	基板端子M3.5×6Lバインドビス(Type⑧)組付 Printed board terminal+M3.5×6L binding head attached (Type⑧)

対応可能ビス Compatible screw	材質 Material	処理 Treatment	形状 Shape
PW, SWセムスパインド M3.5×6L Type③With Plain(Flat) washer and spring lock washer M3.5×6L	鉄 steel	ニッケルメッキ Nickel-Plated	Type③
SWセムスパインド M3.5×6L Type④With spring lock washer M3.5×6L	鉄 steel	ニッケルメッキ Nickel-Plated	Type④
PW, SWセムスナベ M3.5×7L Type⑤With Plain(Flat) washer and spring lock washer M3.5×7L	鉄 steel	ニッケルメッキ Nickel-Plated	Type⑤
SWセムスナベ M3.5×7L Type⑦With spring lock washer M3.5×7L	鉄 steel	ニッケルメッキ Nickel-Plated	Type⑦