


一般公差/General Tolerance ±0.5
 尺度 $\frac{2}{1}$ Scale $\frac{2}{1}$ 単位/Unit mm

※適合電線3.5mm²使用時の圧着端子は“R3.5-4”で使用可能
 The crimp terminal when using the compatible wire 3.5mm² can be used with “R3.5-4”.
 推奨圧着端子はニチフ(株)の圧着端子を基に選定しています。
 The crimp terminals are selected based on the crimp terminals from Nichifu Co., Ltd.

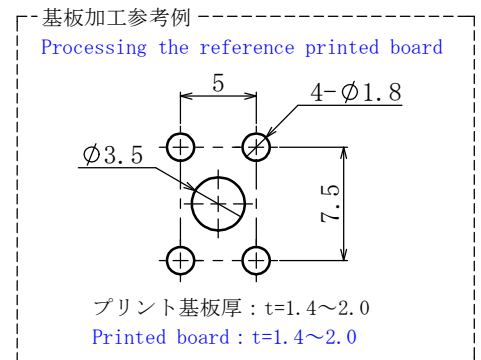

・注文方法: **型番** --- (下表の型番を御参照下さい。)

■仕様 Specifications. ・Ordering Form: Type No. (See the type number in the following table)

番号 Part No.	名称 Part Name	材質 Material	寸法 Size	規格 Standard	処理 Treatment
1	基板端子 Printed board Terminal	黄銅 Brass	板厚 t=0.8	C2680R	スズメッキ Tin-Plated
2	結線ビス Screw	黄銅 Brass	M3	C2700W	ニッケルメッキ Nickel-Plated

型番 Type No.	納入される物 Product Delivered
FP422A	基板端子(M3用)のみ(ビスなし) Printed board terminal(for M3) only(W/O screw)
FP422AS	基板端子+M3×6Lバインドビス組付 Printed board terminal+M3×6L binding head attached

対応可能ビス Compatible screw	材質 Material	処理 Treatment	形状 Shape
PW. SWセムスバインド M3×6L Type③With Plain(Flat)washer and spring lock washer M3×6L	黄銅 Brass	ニッケルメッキ Nickel-Plated	Type③
	鉄 steel		
SWセムスバインド M3×6L Type④With spring lock washer M3×6L	黄銅 Brass	ニッケルメッキ Nickel-Plated	Type④
PW. SWセムスナベ M3×7L Type⑤With Plain(Flat)washer and spring lock washer M3×7L	黄銅 Brass	ニッケルメッキ Nickel-Plated	Type⑤
	鉄 steel		
SWセムスナベ M3×7L Type⑦With spring lock washer M3×7L	黄銅 Brass	ニッケルメッキ Nickel-Plated	Type⑦